



## TERMINEDGE ONE EXTENDED MB FASCIA

SPLICE PLATE VERSION INSTALLATION INSTRUCTIONS

#### TYPICAL INSTALLATION FOR 12'-0" STRAIGHT COVER

FASCIA COVER IN 12'-0" LENGTHS 6" STAINLESS STEEL






STEP 1 - MEMBRANE

POSITION BASE SHEET OF THE BUILT-UP OR MODIFIED ROOFING MEMBRANE OVER THE ROOF EDGE COVERING NAILS COMPLETELY.

NOTE: FOLLOW GENERAL RECOMMENDATIONS OF THE ROOFING MANUFACTURERS APPLICATION OF THE MEMBRANE OVER THE EDGE.


CAUTION: TAKE EXTREME CARE TO AVOID SPILLAGE OF THE ASPHALT OVER THE EDGE

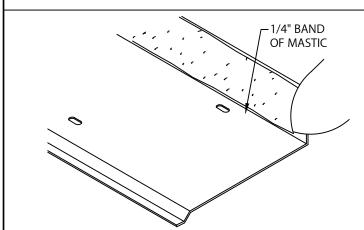

BASE RAIL SHOWN WITH INSIDE FACE UP.

STEP 2 - BASE RAIL (PREPARATION)

LAY THE BASE RAIL ON THE DECK WITH THE OUTSIDE FACE DOWN. IF NECESSARY, CLEAN THE BACK SIDE OF THE BASE RAIL OF DUST OR DIRT. APPLY A HEAVY 1/4" BAND OF MASTIC /SEALANT TO THE BACK OF THE DECK FLANGE FOR THE ENTIRE LENGTH OF THE RAIL AS SHOWN



#### STEP 3 - BASE RAIL SPLICE PLATE

APPLY A HEAVY 1/4" BAND OF APPROVED MASTIC/SEALANT TO THE BOTTOM OF THE 2" WIDE DECK FLANGE OF THE RAIL SPLICE PLATE AS SHOWN.


NEXT, APPLY 3/8" BEADS OF NON-CURING SEALANT TO TOP AND SIDES OF THE RAIL SPLICE AS SHOWN.

	Phone: 828-676-1700	DATE: 01/25/22		5
HICKMAN'		DRN BY: MLM		
EDGE SYSTEMS	www.hickmanedgesystems.com	CKD BY: MM	DWG# 64110-37710	A




### TERMINEDGE ONE EXTENDED MB FASCIA


SPLICE PLATE VERSION INSTALLATION INSTRUCTIONS



#### **STEP 4 - OUTSIDE MITERS**


ON THE BUILDING CORNER, IDENTIFY THE "DOG EAR" OR THE OVERLAP OF THE FLASHING STRIP. FASTEN A 12'-0" SECTION OF BASE RAIL, PREPARED WITH MASTIC/SEALANT AS SHOWN IN STEP #2, TO THE OPPOSITE FACE, WITH THE END EVEN WITH THE EDGE OF THE WALL. FASTEN IN PLACE THROUGH THE RAIL SLOTS 12" O.C. AND 24" O.C. WITH PROVIDED FASTENERS.






#### **STEP 5 - OUTSIDE MITERS**

APPLY NON-CURING SEALANT ADJOINING ENDS OF BASE RAIL AS SHOWN. SLIDE BASE RAIL SPLICE PLATE OVER THE EDGE OF 12'-0" RAIL SECTION. INSTALL RAIL SECTION TO "DOG EAR" SIDE OF THE WALL, LEAVING A 3/8" GAP TO ADJOINING RAIL. FASTEN TO NAILER THROUGH SLOTS 12" O.C. & 24" O.C. WITH PROVIDED FASTENERS. FIELD CUT AS NEEDED. LOCATE 6" SPRING CLIPS AT MITER COVER SPLICE PLATE OR NO FURTHER THAN 12" FROM CORNER. THEN 4'-0" O.C., MAKING SURE THERE WILL BE A SPRING CLIP UNDER EACH FASCIA COVER END.



STEP 6 - BASE RAIL INSTALLATION

INSTALL 12'-0" SECTIONS OF BASE RAIL WITH NON-CURING SEALANT AS SHOWN IN STEP 2. INSTALL BASE RAIL SPLICE PLATE ONTO THE END OF RAIL SECTION TO THE HALFWAY POINT OF THE SPLICE PLATE FLANGE. INSTALL BASE RAIL FROM RIGHT TO LEFT, (AS SEEN FROM ROOF TOP). LEAVE A 3/8" GAP BETWEEN RAIL SECTIONS. FASTEN RAIL TO NAILER THROUGH SLOTS 12" O.C. AND 24" O.C. WITH PROVIDED FASTENERS. FIELD CUT BASE RAIL SECTIONS AS NEEDED.



#### STEP 7 - MITERS


PLACE SPLICE PLATE INTO EACH END OF MITER COVER. SIMPLY POSITION THE COVER ATOP RAIL AND WITH PALM OF HAND APPLY SLIGHT PRESSURE DOWNWARD UNTIL ENGAGED TO BASE RAIL. IF MITERS ARE NOT SUPPLIED, SEE PAGE 5 FOR FABRICATION INSTRUCTIONS.

HICKMAN	Phone: 828-676-1700	DATE: 01/25/22		5
HICKMAN		DRN BY: MLM		•
EDGE SYSTEMS	www.hickmanedgesystems.com	CKD BY: MM	DWG# 64110-37710	Α



### TERMINEDGE ONE EXTENDED MB FASCIA

SPLICE PLATE VERSION INSTALLATION INSTRUCTIONS



REMOVE THE PROTECTIVE FILM FROM FASCIA COVERS.

FROM ROOFTOP. PLACE SPLICE PLATE IN RIGHT END OF COVER. SNAP RIGHT COVER ONTO BASE RAIL BY APPLYING DOWNWARD PRESSURE WITH PALM OF HAND UNTIL THE FASCIA COVER IS FULLY ANGAGED ALONG ENTIRE LENGTH. FIELD CUT COVERS AS REQUIRED WITH FINE TOOTH HACKSAW.

POSITION 12'-0" FASCIA COVERS ON TOP OF BASE RAIL. FASCIA


COVERS SHALL BE INSTALLED FROM LEFT TO RIGHT AS SEEN

**STEP 8 - FASCIA COVER** 

COVER FACTORY NOTCHED TO CLEAR SPLICE PLATE

STEP 9 - FASCIA COVER


POSITION PRE-NOTCHED COVER AND SNAP ONTO BASE RAIL BYPRESSING DOWN WITH THE PALM OF YOUR HAND UNTIL THE COVER IS FULLY ENGAGED ALONG THE ENTIRE LENGTH. ALLOW A 3/8" GAP BETWEEN COVER SECTIONS. FIELD CUT WHERE NECESSARY USING A FINE TOOTH HACKSAW.

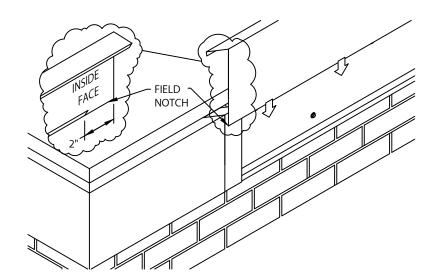

#### STEP 10 - FASCIA COVER

AT MITER, FIELD NOTCH RIGHT SIDE OF COVER AS SHOWN. SNAP ONTO BASE RAIL BY PRESSING DOWN WITH THE PALM OF YOUR HAND UNTIL THE COVER IS FULLY ENGAGED ALONG THE ENTIRE LENGTH. ALLOW 3/8" BETWEEN COVER SECTIONS. FIELD CUT WHERE NECESSARY USING THE FINE TOOTH HACKSAW.


EDGE SYSTEMS www.hickmanedgesystems.com CKD BY: MLM DWG# 64110-37710 A	HICKMAN	Phone: 828-676-1700	DATE: 01/25/22	SHT.# <u>3</u> OF _	5
EDGE SYSTEMS www.hickmanedgesystems.com  CKD BY: MM  DWG# 64110-37710  A			DRN BY: MLM		Δ
	EDGE SYSTEMS	www.hickmanedgesystems.com	CKD BY: MM	DVVG# 64110-37710	A

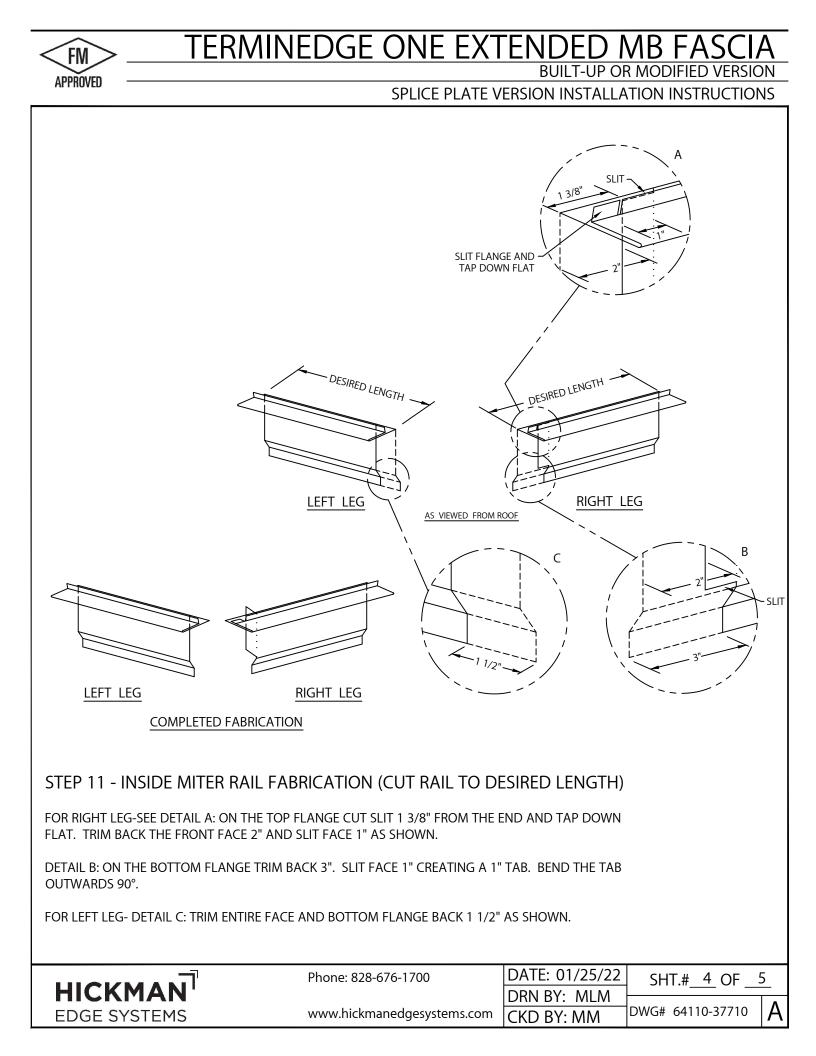

# FM

### TERMINEDGE ONE EXTENDED MB FASCIA BUILT-UP OR MODIFIED VERSION

#### SPLICE PLATE VERSION INSTALLATION INSTRUCTIONS

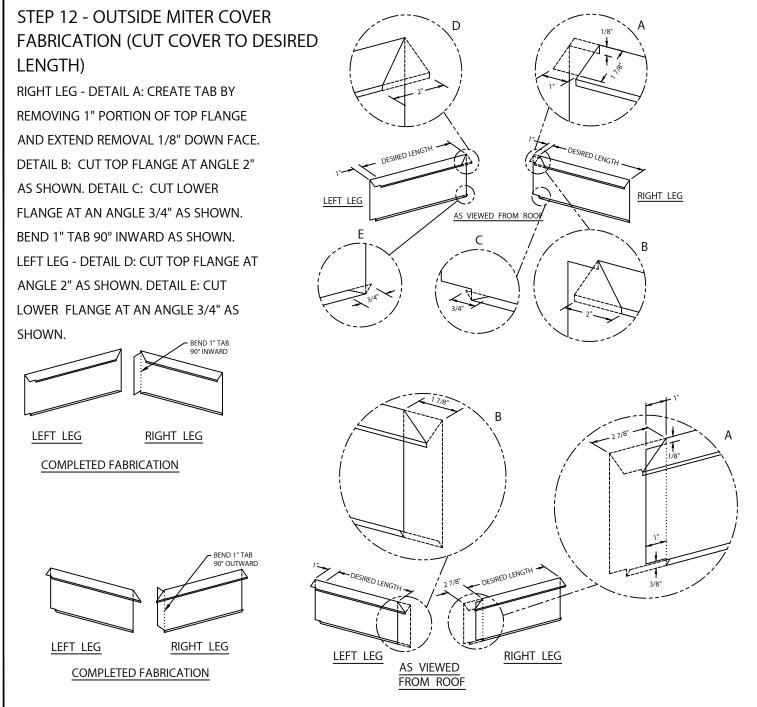

STEP 13 - INSIDE MITER COVER FABRICATION (CUT COVER TO DESIRED LENGTH)

RIGHT LEG - DETAIL A: CREATE TAB BY CUTTING TOP FLANGE AT ANGLE 2 7/8" AS SHOWN. CUT 1/8" DOWN FACE AND 1" HORIZONTALLY. CUT DOWNWARD THROUGH FACE AND CONTINUE CUTTING TO WITHIN 3/8" FROM BOTTOM FLANGE. CUT 1" HORIZONTALLY AS SHOWN, THEN CUT THROUGH BOTTOM FLANGE. BEND 1" TAB 90° OUTWARD AS SHOWN. LEFT LEG : DETAIL B: TRIM BACK THE TOP FLANGE ON ANGLE 1 7/8". PROCEED CUTTING THROUGH FRONT FACE AS SHOWN.

	Phone: 828-676-1700	DATE: 01/25/22	SHT.# 5 OF	5
HICKMAN'		DRN BY: MLM		
EDGE SYSTEMS	www.hickmanedgesystems.com	CKD BY: MM	DWG# 64110-37710	Α