


ELEVATE INDUSTRIAL XL GUTTER

BOX

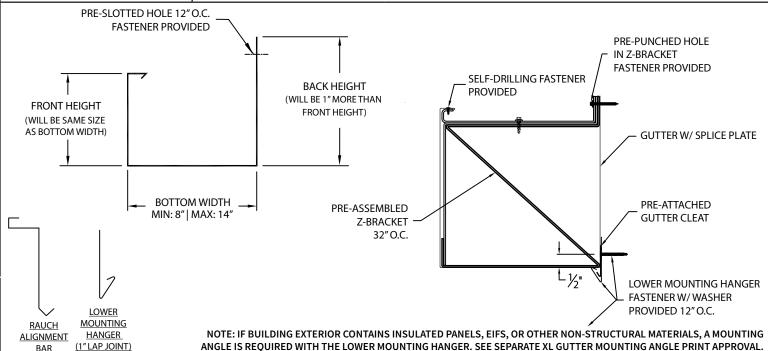

ANGLE IS REQUIRED WITH THE LOWER MOUNTING HANGER. SEE SEPARATE XL GUTTER MOUNTING ANGLE PRINT APPROVAL.

DIMENSIONS

SELECT SIZE	FRONT HEIGHT	BOTTOM WIDTH	BACK HEIGHT
	8"	8"	9"
	9"	9"	10"
	10"	10"	11"
	11"	11"	12"
	12"	12"	13"
	13"	13"	14"
	14"	14"	15"

MATERIAL*

.050" Aluminum

_____ Expansion Joints (Style 1)

Expansion Joints (Style 2)

Color: _____ Finish: _

Substrate:

Wood given, wood fasteners Masonry will be provided.

QUANTITIES

Lineal Feet (12'-0" Lengths)

Outside Miter (90°)

Inside Miter (90°)

Right Endcaps

Left Endcaps

22 Ga.	Galv.	Stee

.063" Aluminum

If substrate is not

Accessory Type*: Quicklock (Default) Welded (Surcharge)

Metal

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All			
products will be installed in strict	SHT# of		

accordance with printed instructions.

Date:

Elevate

26 Century Blvd. Suite 205 Nashville, TN 37214 Contact your local

Elevate representative.

*NOTES

bottom width minus 9/16"

thickness of .050 aluminum.

APPROVALS*

ANSI/SPRI/GT-1

Test Pressures listed in notes

PROJECT INFO

Project Name:

Roofing Contractor:

Project Type:

Architect:

instructions

· Not available in 24 ga. galv. steel or .040" aluminum

- Pre-attached gutter cleat and lower mounting hanger are made out of the same material as the gutter

Unless otherwise noted, fabrication of miters and

accessories are provided with a non-penetrating

- Welded accessories require minimum material

- For non-90 miters, see separate print approval

- ANSI/SPRI/GT-1 test pressures up to 231 psf

(Horizontal), 137 psf (Vertical), 115 psf (Downward)

Product should be installed per provided installation

quicklock joint, then factory sealed watertight

- Maximum downspout dimension not to exceed

- Splice plates and pop rivets provided

SHT# _____ of ____

DATE: 08/14/23

MLM DRN BY:

CKD BY: MM

DWG #: _13012-41331

REV: