


ANSI/SPRI/GT-1 TEST PRESSURES UP TO 136 PSF (VERTICAL) , AND 223 PSF (HORIZONTAL)

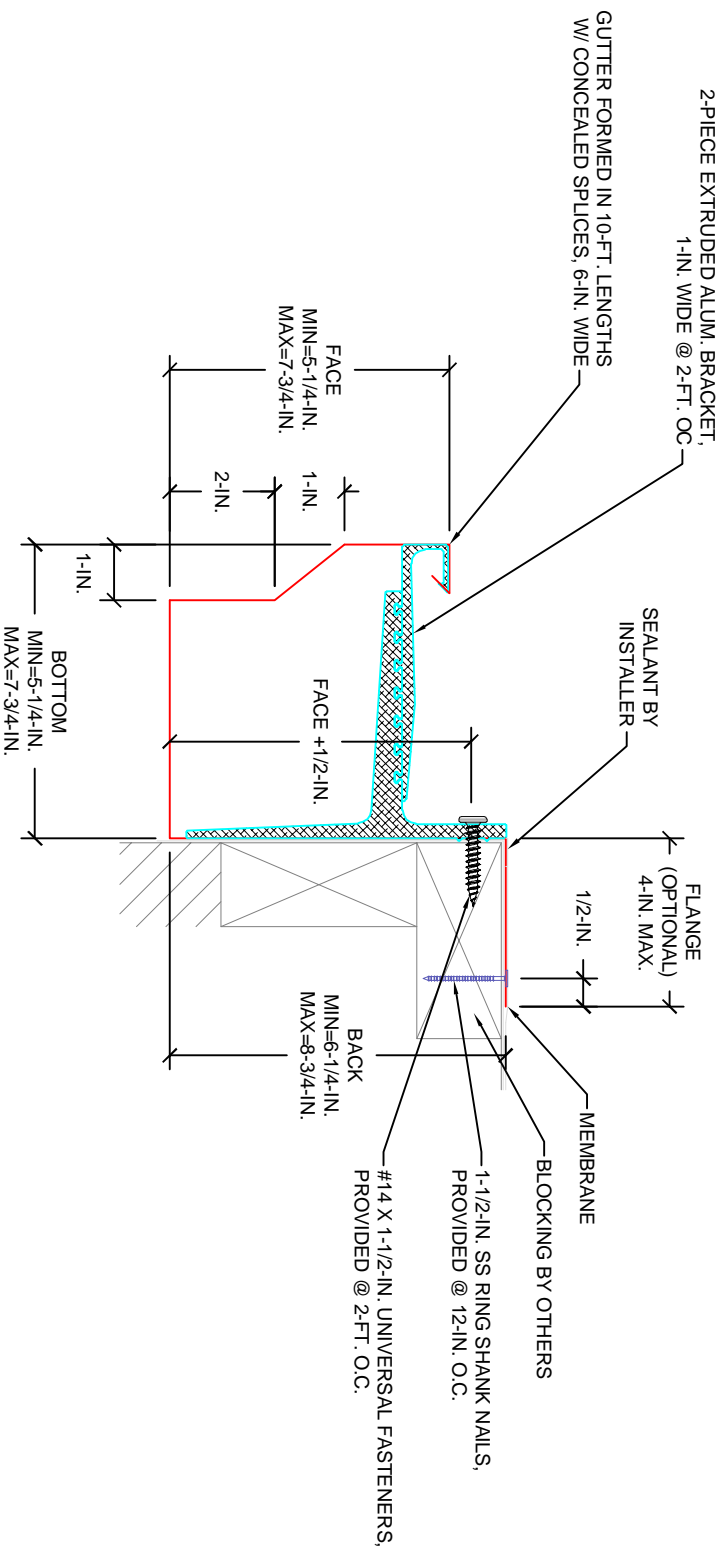

BOTTOM SIZES ARE PROVIDED IN 1/2-IN. INCREMENTS
(e.g. 5-1/4-IN., 5-3/4-IN., 6-1/4-IN.,)

FOR MASONRY APPLICATIONS, PLEASE CONTACT CARLISLE.
CONTACT CARLISLE FOR APPROPRIATE RECOMMENDATIONS NEEDED TO
MEET/EXCEED ANSI/SPRI/GT-1 DESIGN CRITERIA

APPLICATIONS
SINGLE-PLY
MOD-BIT
BUR

SIZES:
SEE DRAWING

NOTES:

- 1- PRODUCT TO BE INSTALLED IN STRICT ACCORDANCE WITH CARLISLE PRINTED INSTRUCTIONS.
- 2- TESTED IN ACCORDANCE WITH ANSI/SPRI/GT-1.

ANSI/SPRI/GT-1 TESTED



Approved

		SECUREEDGE 300 OFFSET GUTTER	
		MAKE: DRINK, INC. KIP	DATE: 04/20/2020
APPRO. BY: UHT	DATE: 04/20/2020	SCALE: NOT TO SCALE	SHEETS: 1 OF 1