

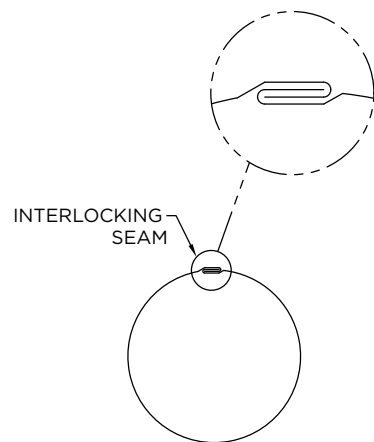


## ROUND DOWNSPOUT



INTERLOCKING  
SEAM

1 3/8" WIDE DOWNSPOUT STRAPS  
(2 PER 10'-0" LENGTH)

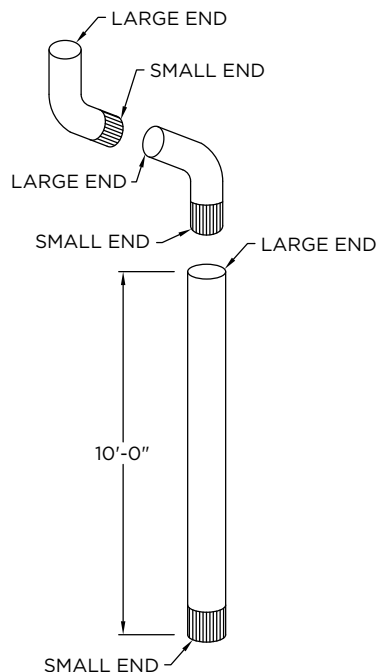

STANDARD ELBOW

### NOTES

- 3" size not available in 22 ga. Galv. Steel or .050" Aluminum
- 8" elbows on separate print approval
- Downspout should be 9/16" smaller than the bottom of the gutter
- Outlet should be 1/8" smaller than the size of the downspout
- Product should be installed per provided installation instructions

### PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

#### Project Type:

☐ By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

#### Hickman Edge Systems

4 Commerce Way  
Arden, NC 28704  
Phone: 828-676-1700  
www.hickmanedgesystems.com

SHT# 1 of 1

DATE: 10/26/21

DRN BY: JJC

CKD BY: MM

DWG #: 64013-36792

REV: A

### DIMENSIONS

- ☐ 3" Round Downspout (Not Available in 22 ga. or .050")
- ☐ 4" Round Downspout
- ☐ 5" Round Downspout
- ☐ 6" Round Downspout
- ☐ 8" Round Downspout (Elbows on separate print approval)

### MATERIAL

- ☐ 24 Ga. Galv. Steel Color: \_\_\_\_\_
- ☐ 22 Ga. Galv. Steel Finish: \_\_\_\_\_
- ☐ .032 Aluminum
- ☐ .040" Aluminum
- ☐ .050" Aluminum
- ☐ OTHER: \_\_\_\_\_

### QUANTITIES

\_\_\_\_\_ Lineal Feet (10'-0" Lengths)

\_\_\_\_\_ Outlets Style A (Flat) \_\_\_\_\_ Style B (Half Round) \_\_\_\_\_

\_\_\_\_\_ Standard Elbows (\_\_\_\_\_°)

\_\_\_\_\_ Standard Elbows (\_\_\_\_\_°)