


VERSITRIM CF COPING

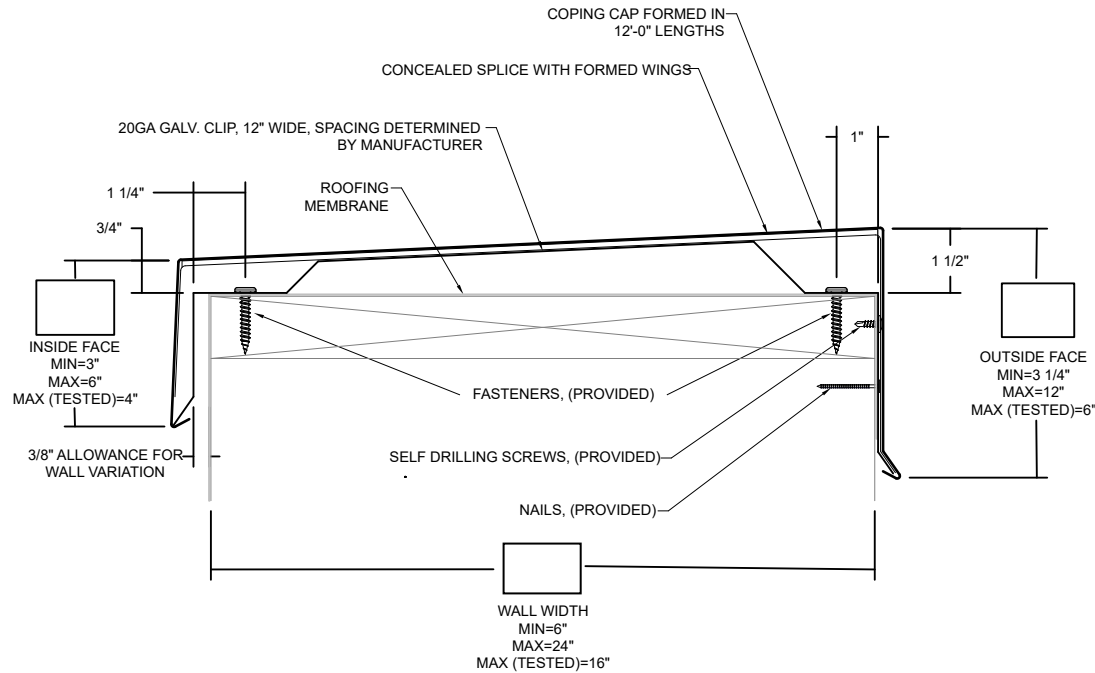

* NOTES

- Oil canning can occur on larger face heights; recommend 22 ga., .050" or .063" for face height above 8"
- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.
- Welded accessories require a minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 test pressures up to 69 psf (Horizontal) and 121 psf (Vertical) for 24 ga. galv. steel cap on 16" wall
- Contact us for masonry applications

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Customer Service
800-558-2162
(Metal-Era)

SHT #: _____ of _____

DATE: **09/19/24**

DRN BY: **PL**

CKD BY: **KP**

DWG #: **18011-37073**

REV: **B**

APPROVALS*

ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

MATERIAL*

- 24 Ga. Galv. Steel
- 22 Ga. Galv. Steel
- .040" Aluminum
- .050" Aluminum
- .063" Aluminum
- OTHER: _____

Color: _____

Finish: _____

Substrate:

if substrate is not given, wood fasteners will be provided.

- Wood
- Masonry
- Metal

QUANTITIES

Accessory Type* : Quicklock (Default) Welded (Surcharge)

_____ Straight Lineal Feet (12'-0" Lengths)

_____ Total Miters (90°) (Inside: ___ | Outside: ___)

_____ Total Endcaps (Left: ___ | Right: ___)

_____ Total Endwall Flashing (Left: ___ | Right: ___)

_____ Transition Miters

_____ T-Miters

_____ Z-Miters

_____ Radius Lineal Feet (Welded) (4'- 0" Lengths)

_____ Radius to Straight Miters (Welded)

_____ Radius End Caps

_____ Vault Lineal Feet (Welded) (4'- 0" Lengths)

_____ Vault to Straight Miters (Welded)

_____ Vault End Caps

_____ Ridge Miters


_____ Valley Miters

VERSITRIM CF COPING

STANDARD ACCESSORIES

NOTES

For special miter and accessory requirements, contact manufacturer for assistance.

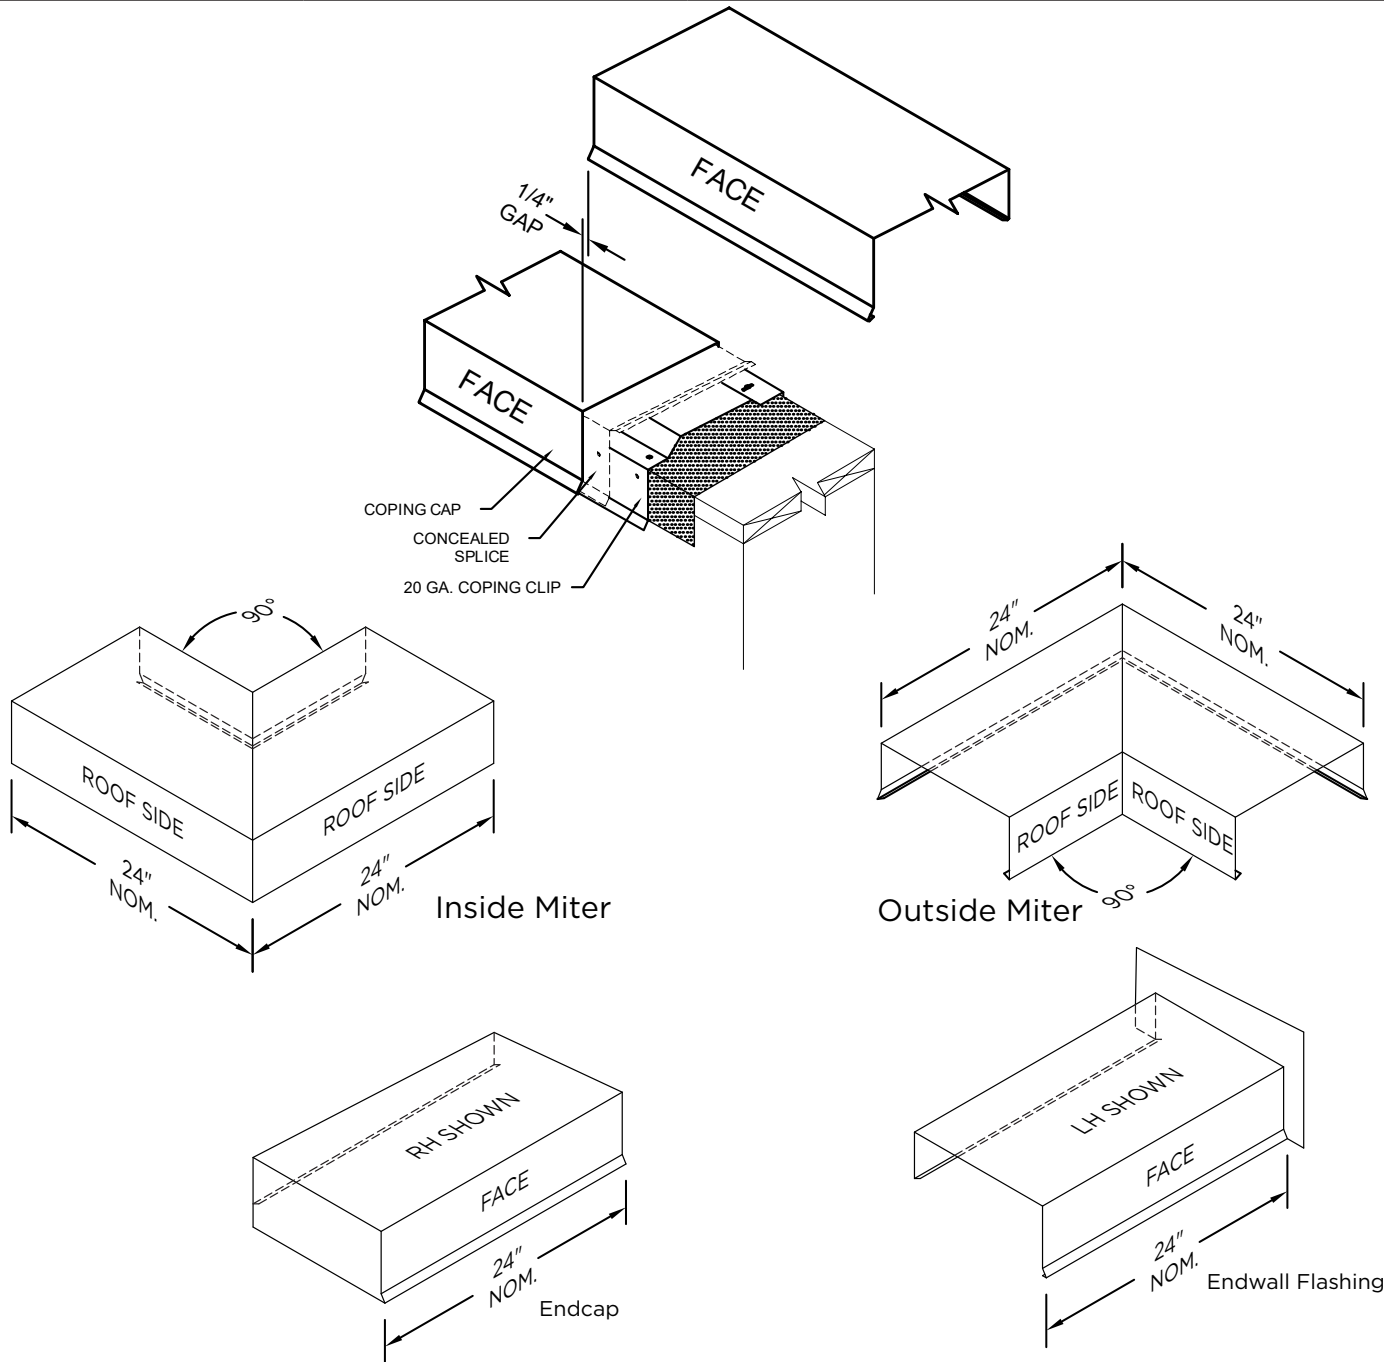

SHT #: ____ of ____

DATE: **09/19/24**

DRN BY: **PL**

CKD BY: **KP**

DWG #: 18011-37073

REV: **B**

Customer Service
800-558-2162
(Metal-Era)