


ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 196 PSF (VERTICAL) , AND 113 PSF (HORIZONTAL)

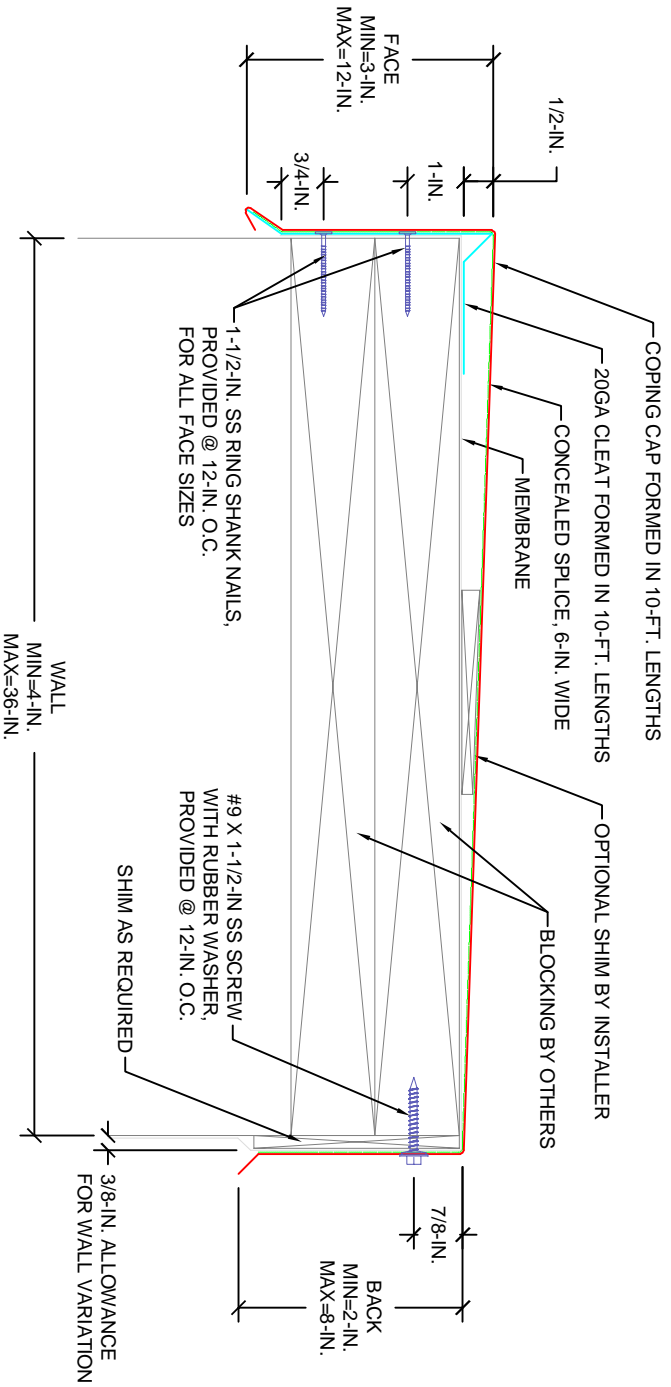

FOR MASONRY APPLICATIONS, PLEASE CONTACT CARLISLE.
 CONTACT CARLISLE FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED
 ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPLICATIONS
 MOD-BIT
 BUR

SIZES:
 SEE DRAWING

NOTES:
 1- PRODUCT TO BE INSTALLED IN STRICT ACCORDANCE WITH CARLISLE PRINTED INSTRUCTIONS.
 2- TESTED IN ACCORDANCE WITH ANSI/SPRI/FM4435/ES-1.

ANSI/SPRI/FM4435/ES-1 TESTED



Approved

NAME:	SECUREEDGE 300 CONTINUOUS CLEAT COPING
DATE:	04/30/2020
SCALE:	NOT TO SCALE
SHEET:	1 OF 1

