




### **CORRUGATED DOWNSPOUT**

3" x 4"



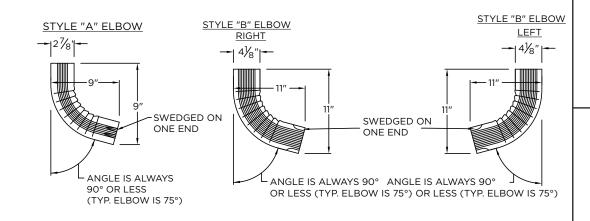

## $2\frac{1}{4}$ " WIDE DOWNSPOUT STRAPS (2 PER 10'-0" LENGTH)



M	AΤ	ER	IA	L
	_			

- ☐ 24 Ga. Galv. Steel
- Color: \_\_\_\_\_ Finish: ☐.032" Aluminum
- OTHER:

# **PROJECT INFO**

Project Name:

**NOTES** 

- Downspout should be 9/16" smaller than

- Product should be installed per provided

- Outlet should be 1/8" smaller than the

the bottom of the gutter

size of the downspout

installation instructions

Architect:

Roofing Contractor:

#### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All					
products will be installed in strict accordance with	SHT# 1 of 1				
printed instructions.	10/26/21				

1 of 1 DATE: \_10/26/21

**Hickman Edge Systems** 

4 Commerce Way Arden, NC 28704 Phone: 828-676-1700

www.hickmanedgesystems.com

DRN BY:

CKD BY: MM

DWG #: 64013-36793

REV:

#### **QUANTITIES**

Lineal Feet (10'-0" Lengths)

Outlets

Standard A Elbows (°)

\_\_\_\_\_ Standard B Elbows-Right ( \_\_\_\_\_°)

\_\_\_\_\_ Standard B Elbows-Left ( \_\_\_\_\_°)