


**SKIRTED TPO DRIP EDGE FASCIA**  
**TPO COATED WITH FACTORY-APPLIED TPO FLASHING**

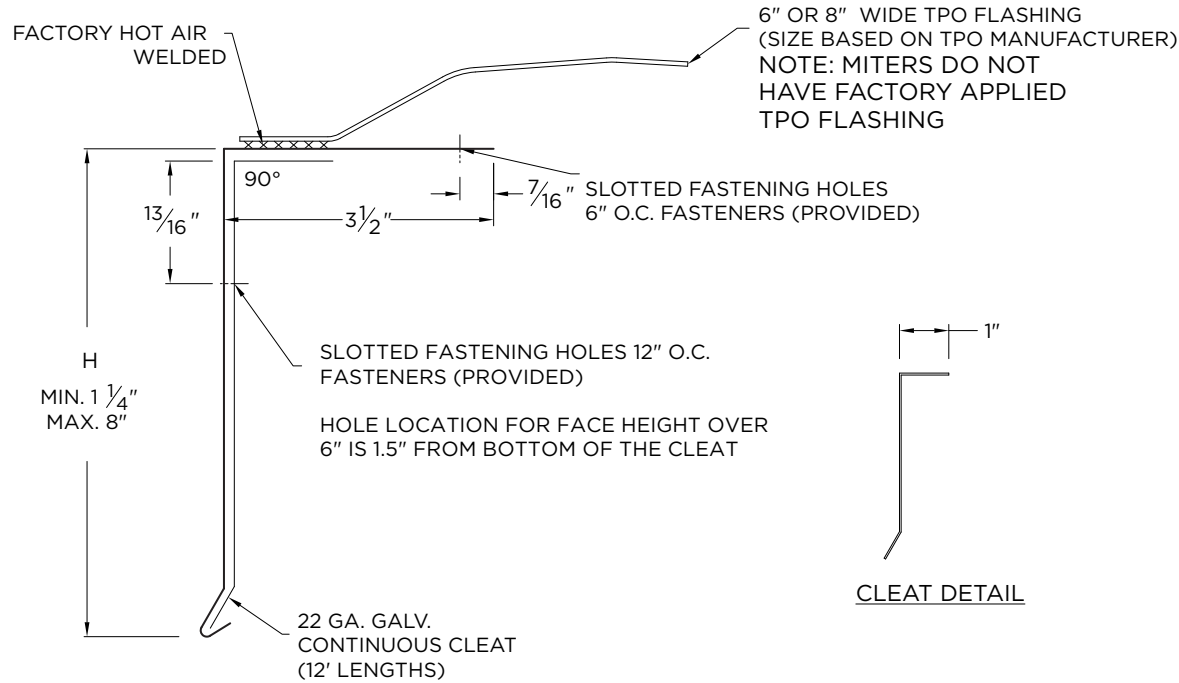

**NOTES**

- All cleats provided in 12'-0" length
- Cover length is 10'-0" or 12'-0" based on TP manufacturer
- Miters do not have factory-applied TP Flashing
- No lap notches or splice plates provide
- For non-90 miters, see separate print approval
- Slotted hole location on cleat for face height over 6" is 1.5" from bottom of the cleat
- Product should be installed per provide installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 282 psf

**APPROVALS**



**ANSI/SPRI/FM 4435/ES-1**  
Test Pressures listed in notes

**PROJECT INFO**

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

**Project Type:**

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

**Hickman Edge Systems**

4 Commerce Way  
Arden, NC 28704  
Phone: 828-676-1700  
www.hickmanedgesystems.com

SHT# 1 of 1

DATE: 10/25/21

DRN BY: JJC

CKD BY: MM

DWG #: 64010-36645

REV: A

**DIMENSIONS**

Choose Face Height Size (H Dimension)

- 3"
- 4"
- 6"
- OTHER (MIN: 1.25" MAX: 8"): \_\_\_\_\_

**MATERIAL**

24 ga. Galv Steel TPO Coated with Factory Applied Flashing

**Color:** White

**Specify TPO Manufacturer:** \_\_\_\_\_

- Substrate:**  Wood  
 Masonry  
 Metal
- If substrate is not given, wood fasteners will be provided.

**QUANTITIES**

\_\_\_\_\_ Lineal Feet (Cover Length Varies Based on TPO Manufacturer)

\_\_\_\_\_ Outside Miter (90°)

\_\_\_\_\_ Inside Miter (90°)