


K-STYLE GUTTER

* NOTES

- .050" provided with splice plates
- 24 ga., 22 ga., .032", .040" all need field notched lap joints
- Stainless steel pop rivets provided
- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight
- Welded accessories require minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions

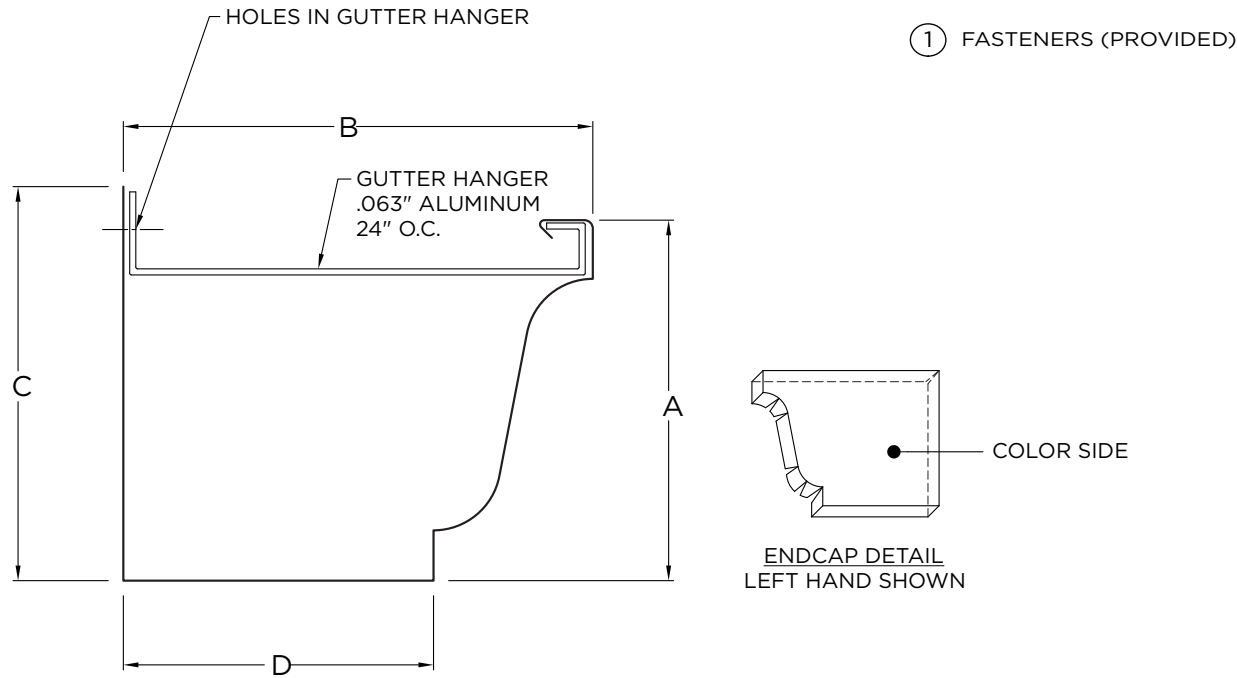

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

DIMENSIONS

GUTTER SIZE	A	B	C	D
<input type="checkbox"/> 6"	4 1/2"	6"	5"	3 7/8"
<input type="checkbox"/> 7"	5 3/8"	7"	5 7/8"	4 5/8"
<input type="checkbox"/> 8"	6"	8"	6 1/8"	5 3/8"

MATERIAL

24 Ga. Galv. Steel Color: _____

22 Ga. Galv. Steel Finish: _____

.040" Aluminum

.050" Aluminum

.063" Aluminum

OTHER: _____

Substrate: Wood

If substrate is not given, wood fasteners will be provided. Masonry

Metal

QUANTITIES

_____ Lineal Feet (10"-0" Lengths)

_____ Outside Miter (90°)

_____ Inside Miter (90°)

_____ Right Endcaps

_____ Left Endcaps

_____ Expansion Joints

Accessory Type*: Quicklock (Default) Welded (Surcharge)

(WELDED OPTION FOR MITERS ONLY)

NOTE: ONE EXPANSION JOINT INCLUDES: (2) ENDCAPS, (1) OUTSIDE COVER PLATE AND (1) TOP PLATE

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Hickman Edge Systems

4 Commerce Way
 Arden, NC 28704
 Phone: 828-676-1700
 www.hickmanedgesystems.com

SHT# 1 of 1

DATE: 11/16/21

DRN BY: JJC

CKD BY: MM

DWG #: 64012-37328

REV: A