




# ELEVATE TPO SKIRTED DRIP EDGE

TPO COATED WITH FACTORY-APPLIED TPO FLASHING

## NOTES

- All cleats provided in 12'-0" lengths
- All Covers provided in 10'-0" lengths
- Miters do not have factory-applied TPO Flashing
- No lap notches or splice plates provided
- Slotted hole location on cleat for face heights over 6" is 1.5" from bottom of the cleat
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 282 psf

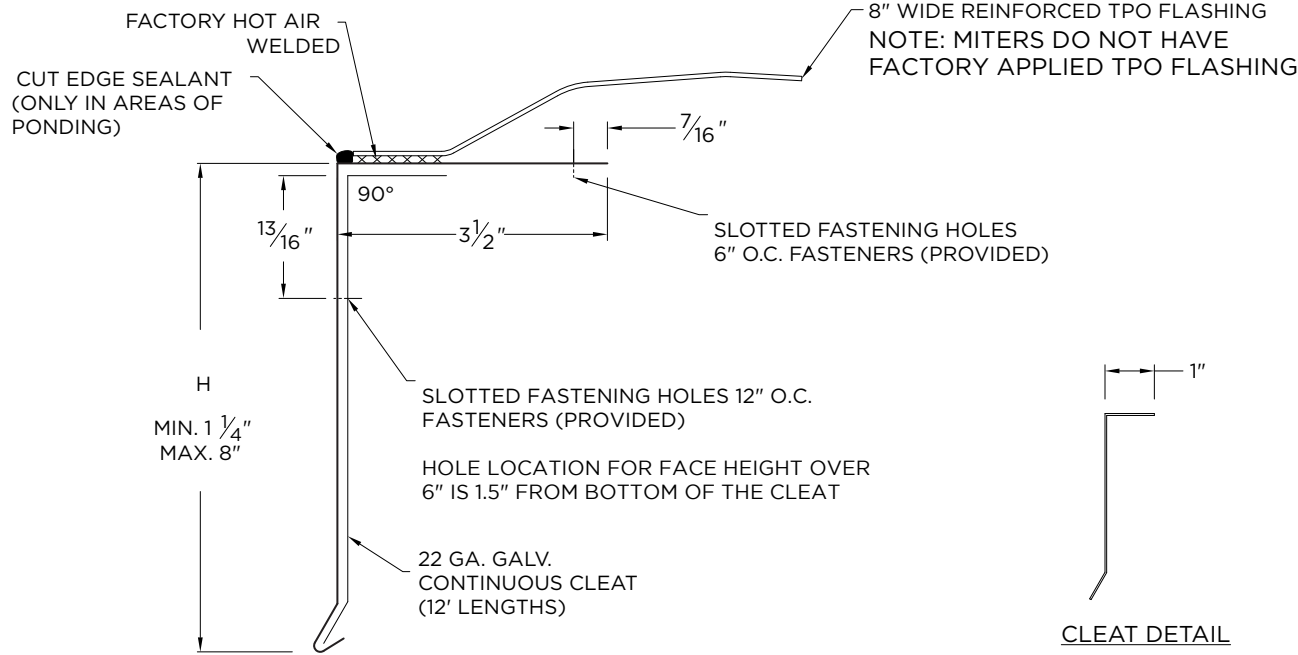

## APPROVALS



ANSI/SPRI/FM 4435/ES-1  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

**Project Type:** \_\_\_\_\_

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

SHT#  1  of  1

DATE:  03/20/23

Date: \_\_\_\_\_

DRN BY:  JJC

CKD BY:  MM

**Elevate**  
26 Century Blvd.  
Suite 205  
Nashville, TN 37214  
Contact your local  
Elevate representative.

DWG #:  13010-20855

REV:  G

## DIMENSIONS

Choose Face Height Size (H Dimension)

- 3"
- 4"
- 6"
- OTHER (MIN: 1.25" MAX: 8"): \_\_\_\_\_

## MATERIAL

24 ga. Galv Steel Elevate TPO Coated with Factory Applied Flashing

**Color:** White

**Substrate:**  Wood  
 Masonry  
 Metal

If substrate is not given, wood fasteners will be provided.

## QUANTITIES

\_\_\_\_\_ Lineal Feet (10'-0" Lengths)

\_\_\_\_\_ Outside Miter (90°)

\_\_\_\_\_ Inside Miter (90°)