


SECUREDGE SYSTEM 200 FASCIA

CRIMP-ON, SINGLE-PLY VERSION

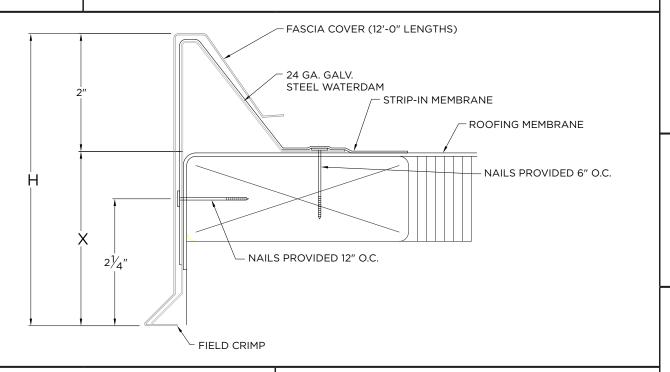

DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
☐ FA-50	5"	3"	1 NAILER
FA-65	6 1/2"	4 1/2"	2 NAILERS
☐ FA-80	8"	6"	3 NAILERS
☐ FA-95	9 1/2"	7 1/2"	4 NAILERS
☐ FA-110	11"	9"	5 NAILERS
FA-125	12 1/2"	10 1/2"	6 NAILERS

MATERIAL

OTHER:

Right Endwall Flashing

Left Endwall Flashing

☐ 24 Ga. Galv. Steel
22 Ga. Galv. Steel
.040" Aluminum
☐.050" Aluminum
.063" Aluminum

Substrate: □ Wood ☐ Masonry given, wood fasteners will be provided. □ Metal

QUANTITIES

Lineal Feet (12'-0" Lengths)

Outside Miter (90°)

Inside Miter (90°)

_____ Right Endcaps

Left Endcaps

Accessory Type: ☐ Quicklock (Default)

☐ Welded (Surcharge)

Overflow Scupper

Color: _____ Finish: __

☐ Style A

☐ Style B

Spillout Scupper

☐ Style A ☐ Style B

Downspout Scupper ☐ Style A ☐ Style B

Size x

Style A=Tapered 1.5" Drop | Style B=Flat

NOTES

- Fascia includes splice plate at joints
- Standard fascia will not function with TPO or PVC strip-in membrane thicker than .060"
- Oil canning can occur on larger face heights; recommend .050"" or .063"" for face heights above 8"
- Welded accessories require minimum material thickness of .050"
- Unless otherwise noted, fabrication of miters and accessories are furnished standard
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 196 psf

APPROVALS





ANSI/SPRI/FM 4435/ES-1

Test Pressures listed in notes

\mathbf{D}		
DDI 1	16.	
PRV		INFO

accordance with

Carlisle SynTec Systems

Customer Service

866-458-3537

(Metal-Era)

Date:

printed instructions.

Project Name:			
Architect:			
Roofing Contractor:			
Project Type:			
By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be			
installed in strict	SHT# 1 of 1		

DATE: 12/21/21

DRN BY: JJC

CKD BY: MM

DWG #: _ 15010-21585