




VERSITRIM 2000 DRIP EDGE

FLAT ROOF FLANGE

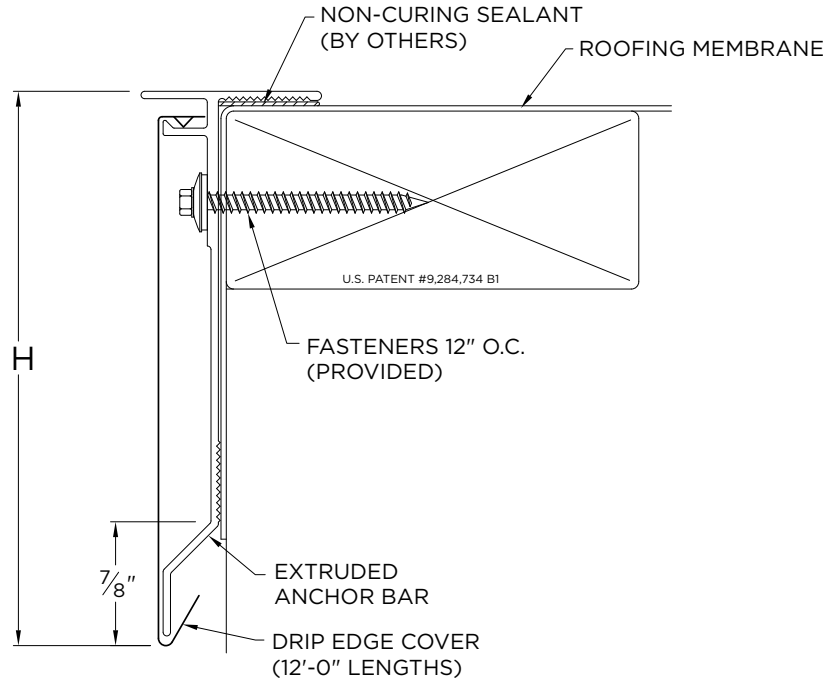

NOTES

- Fascia cover provided with lap joints
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 98 psf

APPROVALS



ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type: _____

☐ By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Versico

Customer Service
800-558-2162
(Metal-Era)

SHT# 1 of 1

DATE: 11/29/21

DRN BY: JJC

CKD BY: MM

DWG #: 18010-21350

REV: H

DIMENSIONS

PRODUCT ID. NO.	H DIM	
<input type="checkbox"/> AFDE-30	3"	
<input type="checkbox"/> AFDE-45	4 1/2"	
<input type="checkbox"/> AFDE-60	6"	
<input type="checkbox"/> AFDE-75	7 1/2"	

MATERIAL

- ☐ 24 Ga. Galv. Steel
☐ 22 Ga. Galv. Steel
☐ .040" Aluminum

Color: _____

Finish: _____

Substrate: ☐ Wood
If substrate is not given, wood fasteners will be provided. ☐ Masonry
☐ Metal

☐ OTHER: _____

QUANTITIES

_____ Lineal Feet (12'-0" Lengths)

_____ Outside Miter (90°)

_____ Inside Miter (90°)