


HALF ROUND GUTTER

VERTICAL FASCIA

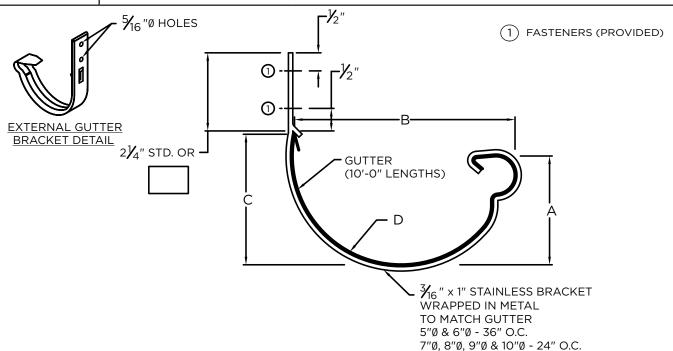

* NOTES

- .050" provided with splice plates
- 24 ga., 22 ga., .032", .040" all need field notched lap joints
- 5" not available in 22 ga. steel or .050" aluminum
- Stainless steel pop rivets provided
- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight
- Welded accessories require minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions

PROJECT INFO

4 Commerce Way

Arden, NC 28704

Phone: 828-676-1700

www.hickmanedgesystems.com

DIMENSIONS		Fill out additional information on the drawing above.			MATERIAL*	
GUTTER DIAMETER	А	В	С	D	☐ 24 Ga. Galv. Steel ☐ 22 Ga. Galv. Steel	Color: Finish:
5" 6" 7" 8" 9"	2 1/2" 3" 3 1/2" 4" 4 1/2" 5"	5 1/4" 6 1/4" 7 1/4" 8 1/4" 9 1/4" 10 1/4"	3" 3 1/2" 4" 4 1/2" 5" 5 1/2"	2 1/2" Radius 3" Radius 3 1/2" Radius 4" Radius 4 1/2" Radius 5" Radius	☐ .032" Aluminum ☐ .040" Aluminum ☐ .050" Aluminum ☐ .0THER:	Substrate: If substrate is not given, wood fasteners will be provided. Wood Masonry Metal

Project Name:					
Architect:					
Roofing Contractor:					
Project Type:					
By selecting this box yo confirmed that dimension are correct. All products will be	u have verified and ons, sizes, and quantities				
installed in strict accordance with	SHT# 1 of 1				
printed instructions.	DATE: 11/29/21				
Date:	DRN BY:				
Hickman Edge Systems	CKD BY:MM				

DWG #: 64012-37331

REV:

QUANTITIES

Lineal Feet (10"-0" Lengths)	Accessory Type*: ☐ Quicklock (Default) ☐ Welded (Surcharge)
Outside Miter (90°)	

_____ Inside Miter (90°)

Right Endcaps

Left Endcaps

_____ Expansion Joints

NOTE: ONE EXPANSION JOINT INCLUDES: (2) ENDCAPS, (1) OUTSIDE COVER PLATE AND (1) TOP PLATE