


# SecurEdge 300 Offset Gutter

## Order Specification Form

ANSI/SPRI/GT-1 TEST PRESSURES UP TO 136 PSF(VERTICAL) , AND 223 PSF (HORIZONTAL)

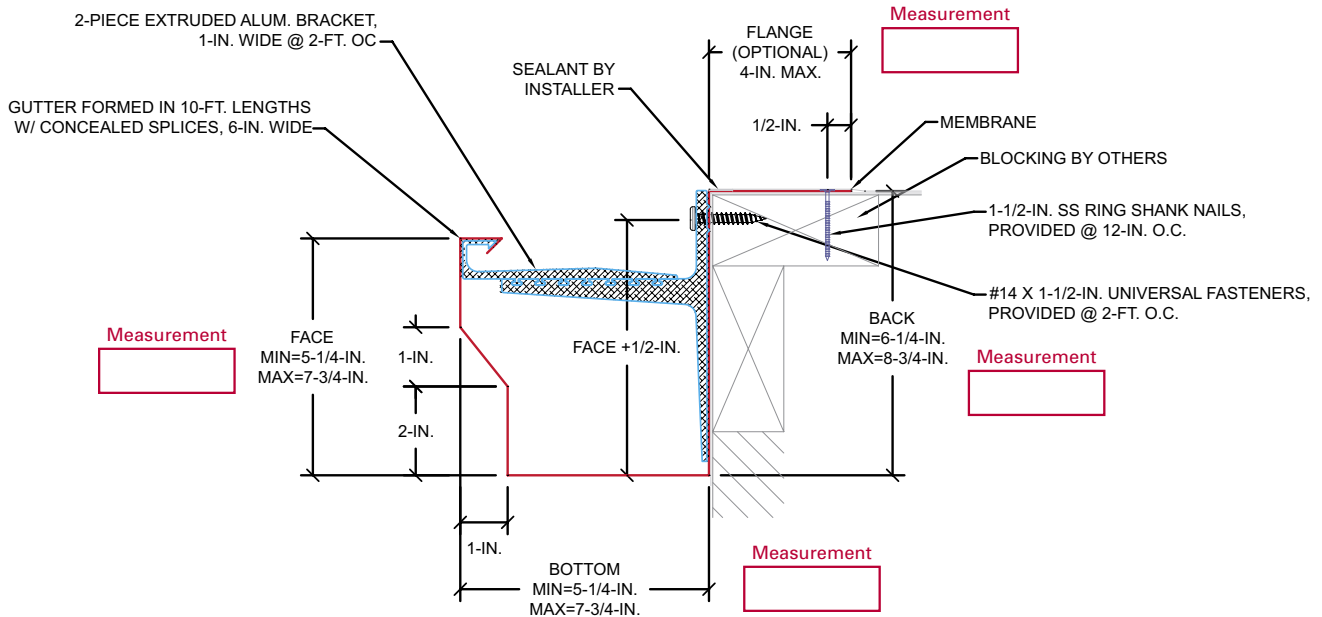

BOTTOM SIZES ARE PROVIDED IN 1/2-IN. INCREMENTS  
(e.g. 5-1/4-IN., 5-3/4-IN., 6-1/4-IN., . . . )

FOR MASONRY APPLICATIONS, PLEASE CONTACT US.

CONTACT US FOR APPROPRIATE RECOMMENDATIONS NEEDED TO  
MEET/EXCEED ANSI/SPRI/GT-1 DESIGN CRITERIA

QUANTITY	CAP MATERIAL	THICKNESS	ACCESSORY TYPE	CAP FINISH
___ Total LF (10' pcs)	Aluminum	0.040	Welded	Mill Finish
___ Miters (___ Outside, ___ Inside)	Galvanized	0.050	Metal-Lok	Prefinished Kynar
___ End Caps (___ Left, ___ Right)	Stainless Steel	0.063		Post Finished Kynar
___ Expansion Joints (If Required)		0.080		Prefinished Anodized
___ Radius LF (5'-0" pcs)		24 Ga.		Post Finished Anodized
	<b>COLOR</b>	22 Ga.		
	<input type="checkbox"/> _____			

**APPROVALS:** Contact manufacturer for verification of test report data on your project.

ANSI/SPRI/GT-1/Tested



**CUSTOMER APPROVAL**

Authorized Customer Signature

Approved for Fabrication  
Approved with Changes  
Not Approved

\_\_\_\_\_  
Title Date

Job Name:

Job #:

By:

Customer:

Project Location:


Date:

Representative:

Architect:

Sheet of

# SecurEdge 300 Offset Gutter

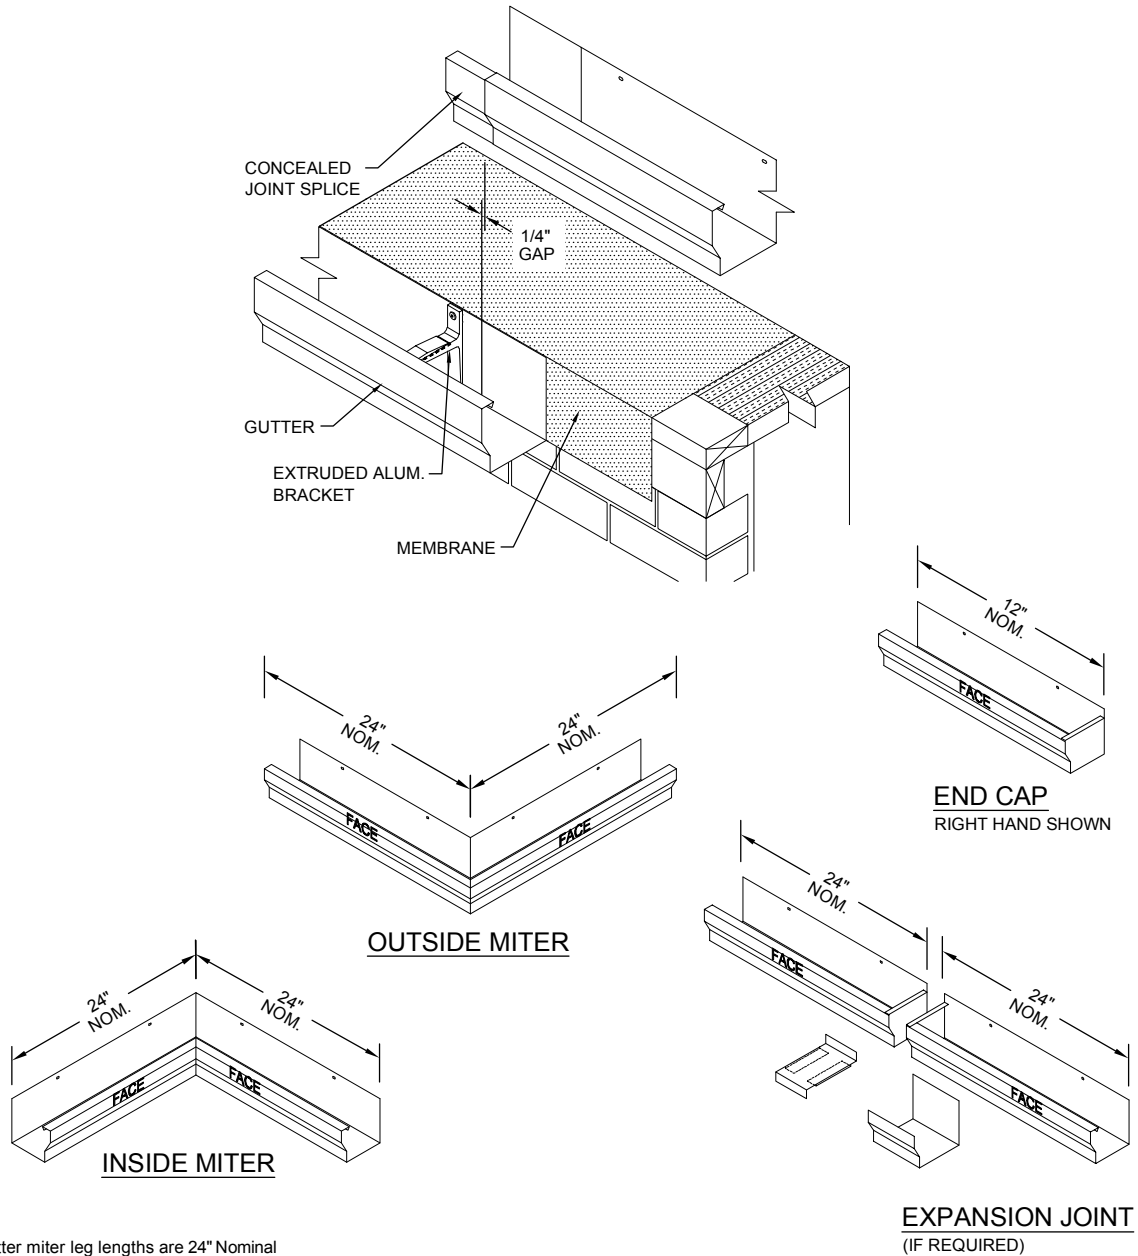

Standard gutter miter leg lengths are 24" Nominal  
 Standard gutter miter angle is 90°  
 For special miter requirements, attach sketches or consult manufacturer for assistance.