
HICKMAN Traditional Gutter with Roof Flange.

ORDER SPECIFICATION FORM

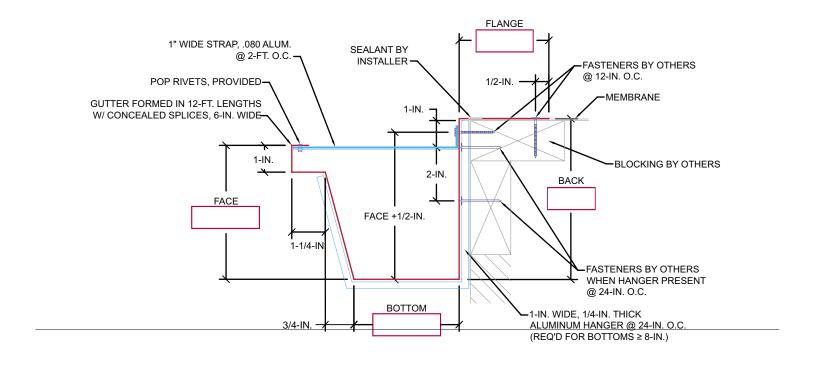

PLEASE CONTACT US FOR MASONRY APPLICATIONS.

CONTACT US FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED ANSI/SPRI/GT-1 DESIGN CRITERIA


QUANTITY		CAP MATERIAL	THICKNESS	ACCESSORY TYPE	CAP FINISH				
	Total LF (12' pcs) Miters (Outside, Inside) End Caps (Left, Right) Expansion Joints (End Caps) End Cap Inserts (Left, Right) Expansion Joint Inserts Radius LF (5'-0" pcs) Radius to Straight Miter Radius End Caps	Aluminum Galvanized Stainless Steel	0.040 0.050 0.063 0.080 24 Ga. 22 Ga.	Welded Metal-Lok HANGERS Painted Mill	Mill Finish Prefinished Kynar Premium Prefinished Kynar Post Finished Kynar Prefinished Anodized Post Finished Anodized				
		COLOR		None					
CUSTOMED ADDROVAL Authorized Containing									

APPROVALS: Contact manufacturer for verification of test report data on your project.		CUSTOMER APPROVAL	Authorize	rized Customer Signature	
ANSI/SPRI/GT-1/Tested		Approved for Fabrication Approved with Changes			
		Not Approved	Title	Date	
Job Name:		Job#:		By:	
Customer:		Project Location:		Date:	
Representative:		Architect:		Sheet of	



Traditional Gutter with Roof Flange.

ORDER SPECIFICATION FORM

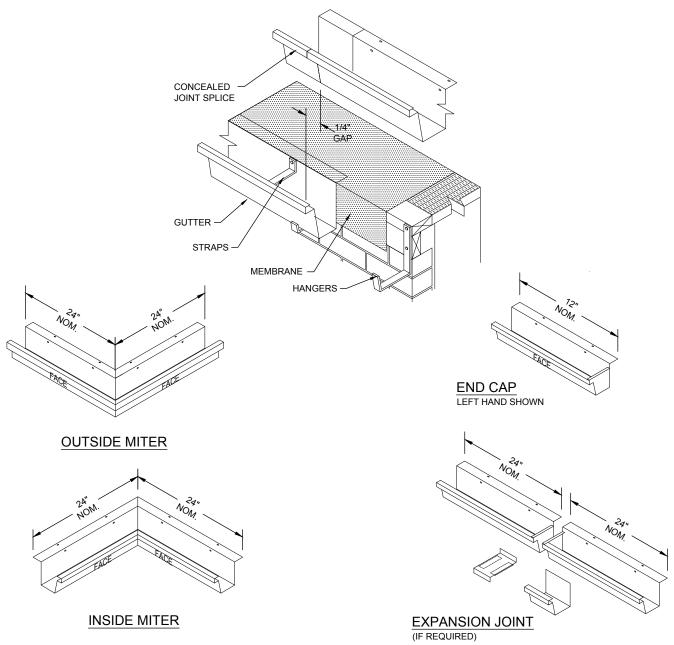

Standard gutter miter leg lengths are 24" Nominal Standard gutter miter angle is 90° For special miter requirements, attach sketches or consult manufacturer for assistance.



