




ELEVATE SEAL-TITE K-STYLE GUTTER

* NOTES

- .050" provided with splice plates
- 24 ga., 22 ga., .032", .040" all need field notched lap joints
- Stainless steel pop rivets provided
- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight
- Welded accessories require minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions

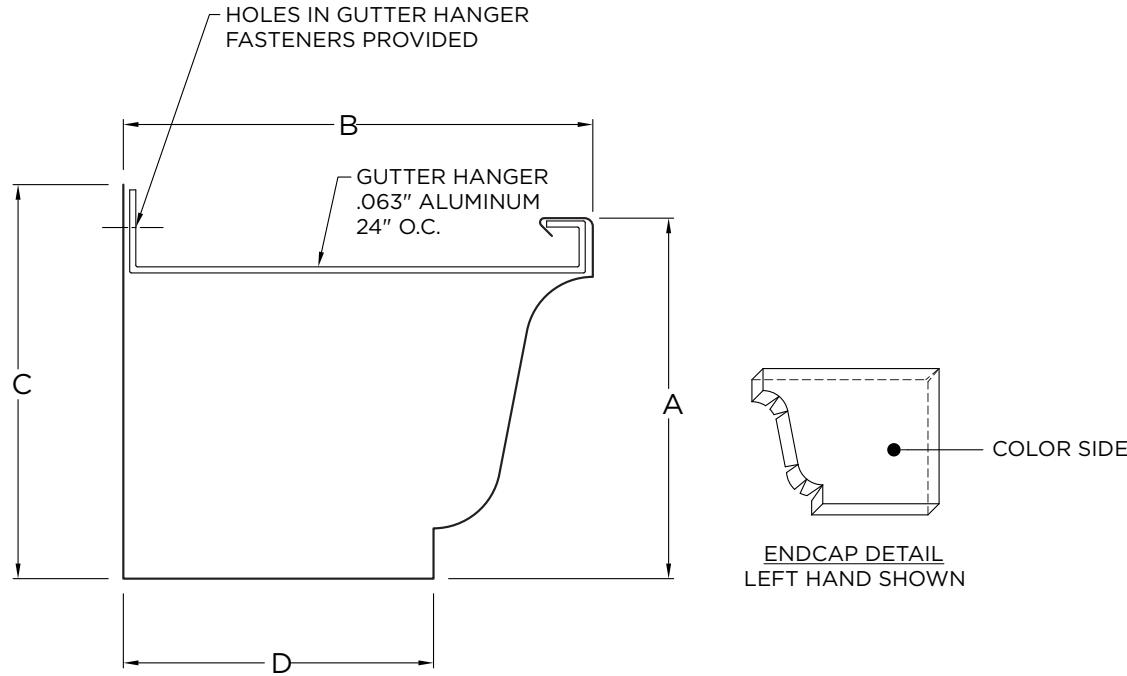

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Elevate
 26 Century Blvd.
 Suite 205
 Nashville, TN 37214
 Contact your local
 Elevate representative.

SHT# 1 of 1

DATE: SSSSSSSSSSSS
 2-2-01

DRN BY: JJC

CKD BY: MM

DWG #: 13012-31952

F 9J : SSSSSSSSSSSS

DIMENSIONS

GUTTER SIZE	A	B	C	D
<input type="checkbox"/> 6"	4 1/2"	6"	5"	3 7/8"
<input type="checkbox"/> 7"	5 3/8"	7"	5 7/8"	4 5/8"
<input type="checkbox"/> 8"	6"	8"	6 1/8"	5 3/8"

MATERIAL

- 24 Ga. Galv. Steel Color: _____
- 22 Ga. Galv. Steel Finish: _____
- .032" Aluminum
- .040" Aluminum
- .050" Aluminum
- OTHER: _____
- Substrate: Wood
If substrate is not given, wood fasteners will be provided. Masonry
 Metal

QUANTITIES

- _____ Lineal Feet (10"-0" Lengths)
- _____ Outside Miter (90°)
- _____ Inside Miter (90°)
- _____ Right Endcaps
- _____ Left Endcaps
- _____ Expansion Joints
- Accessory Type*: Quicklock (Default) Welded (Surcharge)
 (WELDED OPTION FOR MITERS ONLY)

NOTE: ONE EXPANSION JOINT INCLUDES: (2) ENDCAPS, (1) OUTSIDE COVER PLATE AND (1) TOP PLATE