


SKIRTED PVC DRIP EDGE FASCIA
PVC COATED WITH FACTORY-APPLIED PVC FLASHING

NOTES

- All cleats provided in 12'-0" length
- All Covers provided in 10'-0" length
- Miters do not have factory-applied PV Flashing
- No lap notches or splice plates provide
- Slotted hole location on cleat for face height over 6" is 1.5" from bottom of the cleat
- For non-90 miters, see separate print approval
- Product should be installed per provide installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 282 psf

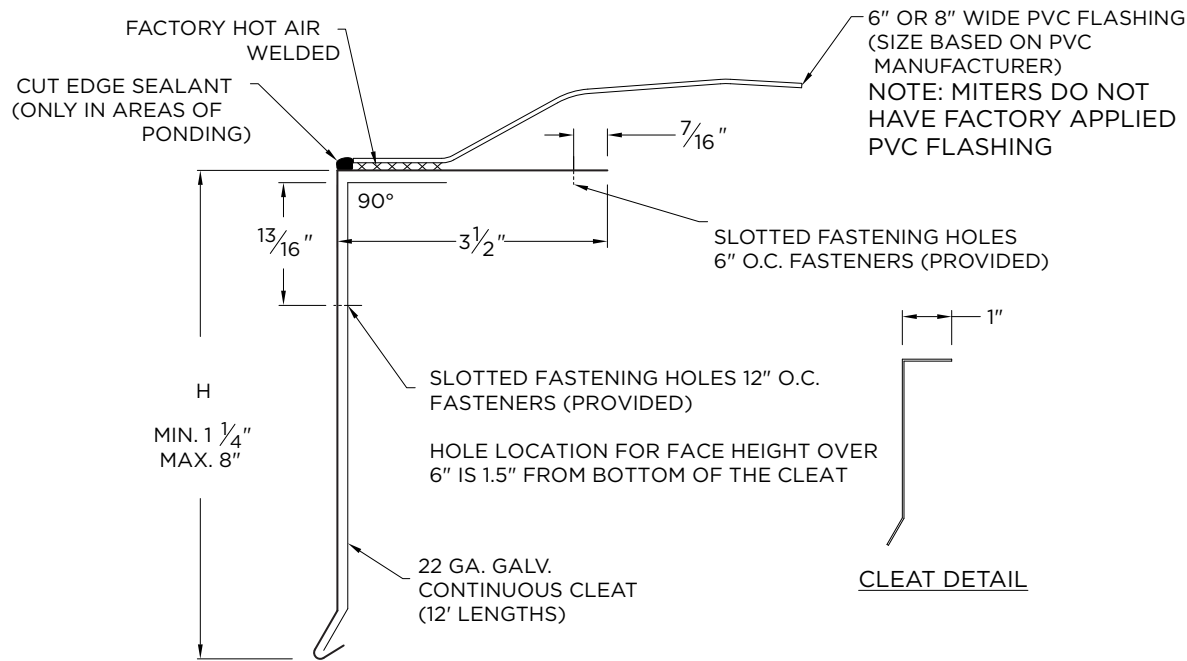

APPROVALS



ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Hickman Edge Systems
4 Commerce Way
Arden, NC 28704
Phone: 828-676-1700
www.hickmanedgesystems.com

SHT# 1 of 1
DATE: 10/25/21
DRN BY: JJC
CKD BY: MM
DWG #: 64010-37323
REV: A

DIMENSIONS

Choose Face Height Size (H Dimension)

- 3"
- 4"
- 6"
- OTHER (MIN: 1.25" MAX: 8"): _____

MATERIAL

24 ga. Galv Steel PVC Coated with Factory Applied Flashing

Color: White

Specify PVC Manufacturer: _____

Substrate: Wood

If substrate is not given, wood fasteners will be provided.

- Masonry
- Metal

QUANTITIES

_____ Lineal Feet (10'-0" Lengths)

_____ Outside Miter (90°)

_____ Inside Miter (90°)