


SKIRTED PVC DRIP EDGE FASCIA
COLOR PVC COATED WITH FACTORY-APPLIED PVC FLASHING MEMBRANE

NOTES

- All cleats provided in 12'-0" lengths
- All covers provided in 8'-0" lengths
- Miters do not have factory-applied PVC Flashing
- No lap notches or splice plates provided
- Slotted hole location on cleat for face heights over 6" is 1.5" from bottom of the cleat
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 282 psf

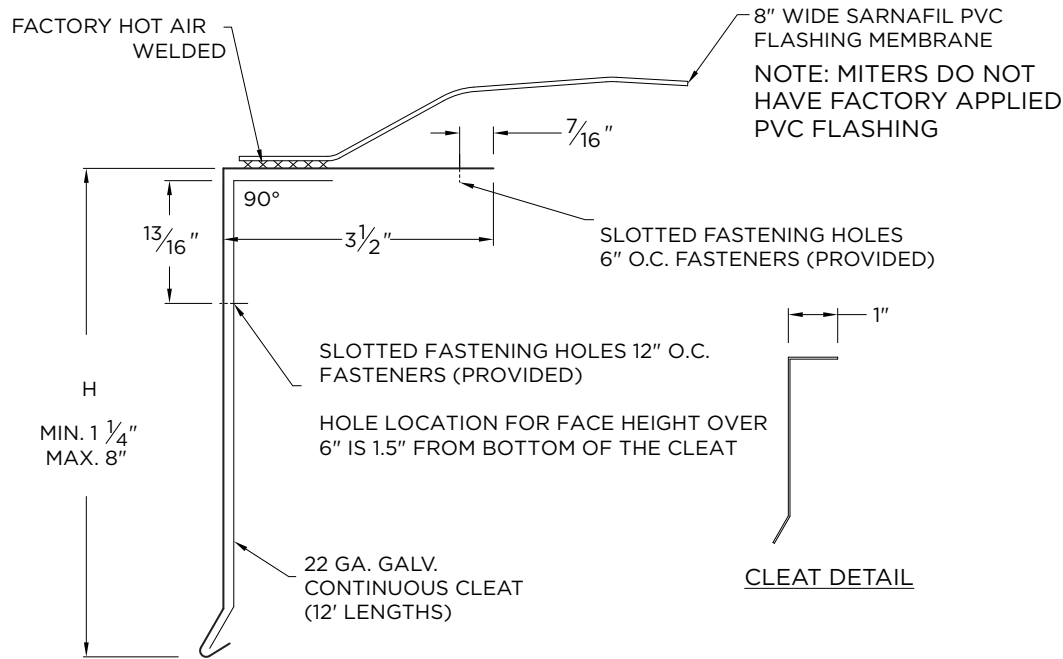

APPROVALS



ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Hickman Edge Systems

4 Commerce Way
Arden, NC 28704
Phone: 828-676-1700
www.hickmanedgesystems.com

SHT# 1 of 1

DATE: 10/18/22

DRN BY: JJC

CKD BY: MM

DWG #: 64010-39694

REV: A

DIMENSIONS

Choose Face Height Size (H Dimension)

- 3"
- 4"
- 6"
- OTHER (MIN: 1.25" MAX: 8"): _____

MATERIAL

24 ga. Galv Steel PVC Coated (Sika Sarnaclad) with Factory-Applied Flashing Membrane

Color:

Flashing Membrane:

- G 410
- S 327

Substrate:

- Wood
 - Masonry
 - Metal
- If substrate is not given, wood fasteners will be provided.

QUANTITIES

_____ Lineal Feet (8'-0" Lengths)

_____ Outside Miter (90°)

_____ Inside Miter (90°)