


## **ELEVATE SNAP-ON FASCIA**

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

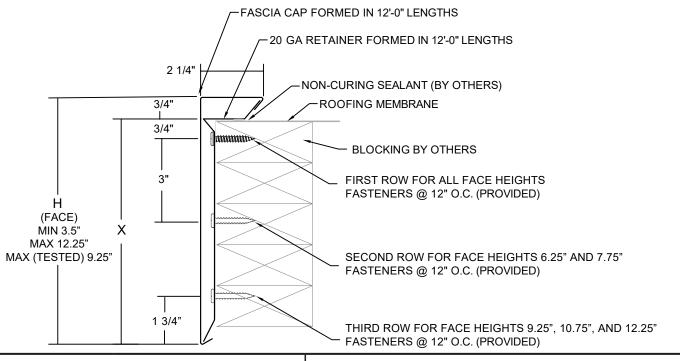

## **DIMENSIONS**

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
☐ TE-350*	3 1/2"	2 3/4"	1 NAILER
☐ TE-475	4 3/4"	4"	2 NAILERS
☐ TE-625	6 1/4"	5 1/2"	3 NAILERS
☐ TE-775	7 3/4"	7"	4 NAILERS
☐ TE-925*	9 1/4"	8 1/2"	5 NAILERS
☐ TE-1075*	10 3/4"	10"	6 NAILERS
☐ TE-1225*	12 1/4"	11 1/2"	7 NAILERS

# **MATERIAL**

24 Ga. Galv. Stee
22 Ga. Galv. Stee
.040" Aluminum
.050" Aluminum
☐.063" Aluminum

OTHER:

Color:	
Finish: _	

Substrate:	
If substrate is not	$\Box$
given, wood fasteners	Ш
will be provided	

-	ш	vvood
5		Masonry
	П	Metal

# **QUANTITIES**

Straight Lineal Feet (12'-0" Lengths)

Radius Lineal Feet (4'-0" Lengths)\*

Outside Miter (90°) (Cover Only)

Inside Miter (90°) (Cover Only)

Right Endcaps

Left Endcaps

Right Endwall Flashing

\_\_\_\_\_ Left Endwall Flashing

Downspout Scupper

Spillout Scupper

### \* NOTES

- Fascia cover provided with splice plates
- 3.5" face height only available in 24 ga. galv steel and .040" aluminum
- Face heights 9.25" and over only available in 22 ga. galv steel or .050" and .063" aluminum
- Pre-drill with 3/16" in. drill for masonry conditions
- Product cannot be installed on conditions smaller than 5 ft. radius
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 381 psf

## **APPROVALS**





ANSI/SPRI/FM 4435/ES-1

Test Pressures listed in notes

	_	 
_	$\sim$	
uu	<i>(</i> )	
$-\kappa$	<b>U</b> .	INFO

PROJ			
Project Nam	ne:		
Architect:			
Roofing Cor	ntractor:		
Project Ty	pe:		
■ By se	lecting this box	k vou have v	erified and
confir are co produ			, and quantities
	dance with	3HI#.	01

printed instructions

Data		
Date: _	 	 _

### **Elevate**

26 Century Blvd. Suite 205 Nashville, TN 37214 Contact your local Elevate representative.

SHT#	of
	0/17/07

ATE: _	,	,	
_			

DRN BY: \_\_\_PL

## CKD BY: \_\_\_

DWG #: 13010-36890